

## Thermowells

---

Why do we use thermowells?


Thermowells are used to guard temperature sensors such as thermocouples, thermistors and bimetal thermometers against damage from excessive pressure, material velocity and corrosion.

# Thermowells

Den Holder manufactures thermowells in any required material and in accordance with any applicable standard drawing. This means the thermowells can be supplied in any required length with threaded ends, socket weld ends or flanged ends, in which case the welds are made by qualified welders and supported by welder qualification documents. Most common steels and stainless steels are on stock in order to make fast deliveries possible.

## ORDERING DATA

- MATERIALS**
- ASTM A182-F304 (L, H)
  - ASTM A182-F316 (L, H, Ti)
  - ASTM A182-F321 (H)
  - ASTM A182-F347 (H)
  - ASTM A182-F44, F51, F55
  - UNS S31803 (duplex),
  - UNS S32750 (super duplex)
  - 254 Smo
  - ASTM A182-F1, F5, F9, F11, F22, F91
  - Hastelloy,
  - Monel, Inconel
  - Alloy 400, 600, 625, 800, 825, C-276

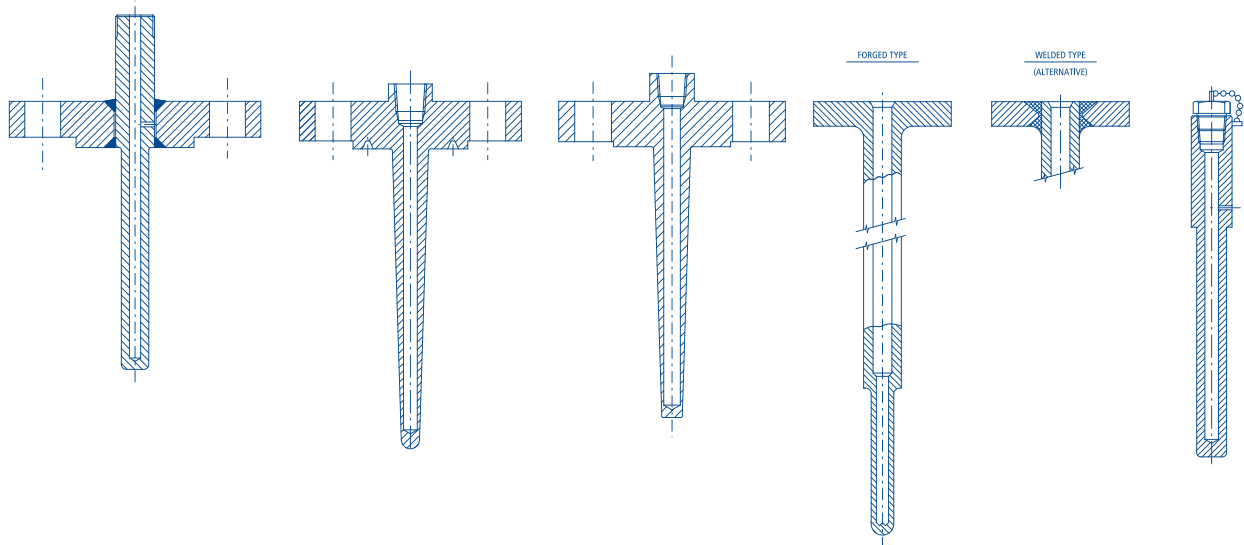

EUROPE  
Minervum 7238  
4817 ZJ Breda  
The Netherlands

Phone +31(0)88 11 67 600  
Email: [info@denholder.com](mailto:info@denholder.com)



[www.denholder.com](http://www.denholder.com)

MIDDLE EAST  
P.O. Box 3949  
Abu Dhabi  
United Arab Emirates  
Phone +971 24 493 841  
Fax +971 24 493 824  
Email: [info@denholder.ae](mailto:info@denholder.ae)